




Mavitek MVD series band pass/band reject, 6 cavity duplexers are designed and produced for the 136-174MHz band. They perform simultaneous receive and transmit function into the same antenna with minimum insertion loss and maximum performance. MVD series duplexers are blue enamel painted copper. The connectors are silver plated and PTFE insulated. MVD series are configured to be installed in cabinets if needed. With high "Q" values they achieve maximum isolation and superior performance with 500kHz Rx/Tx frequency shift.

MVD series perform flawlessly under extreme conditions like -30°C to +60°C under 300Watts maximum input power. They are the ideal choice for full duplex repeaters and base stations. MVD series duplexers will be tuned to the frequencies required by the customer and shipped ready for installation. If field retuning is needed, it can be performed flawlessly by the "Invar" tuning rod within the duplexer's frequency range.

- ▲ Copper Cavities
- ▲ Silver Plated Connectors
- ▲ High Stability and Sensitivity
- ▲ Designed for Extreme Conditions

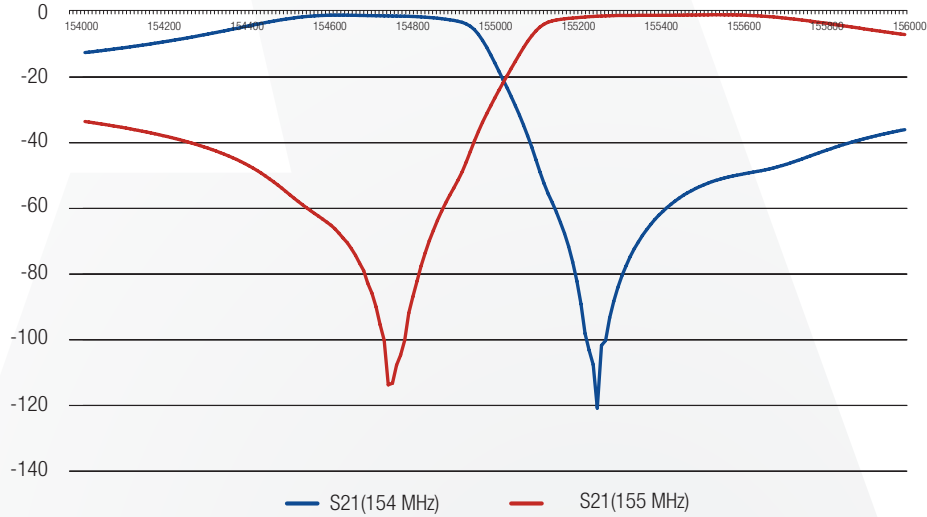

Model No	MVD6138	MVD6148
<b>Electrical Specifications</b>		
Tuning Range	136-150MHz	148-174MHz
Minimum Frequency Separation	500kHz	
Maximum Input Power	300W	
Insertion Loss Tx/Rx to Ant.	1.5dB nominal	
VSWR (max.)	1.5:1 or less	
Rx Isolation at Tx Frequency	90dB min	
Tx Isolation at Rx Frequency	90dB min	
Impedance	50Ω Nominal	
<b>Mechanical Specifications</b>		
Temperature Range	-30°C to +60°C	
Number of Cavities / Dia.	6/150mm	
Connectors	N - Type Female	
Color / Paint	Blue / Glossy Enamel	
Weight (approx.)	23.5kg / 52lbs	
Dimensions (WxHxD)	480x740x330mm / 18.9x29.1x13in	

Telsan Telsiz San. ve Tic. A.Ş.

T: +90 212 2122232 F: +90 212 2126899 Büyükdere Caddesi No:81 Kat:7 Mecidiyeköy 34387 İstanbul Turkey

[www.mavitek.com](http://www.mavitek.com)